


EXTERNAL LOCKS : SWIVEL LOCK


>> Swivel lock : Double function

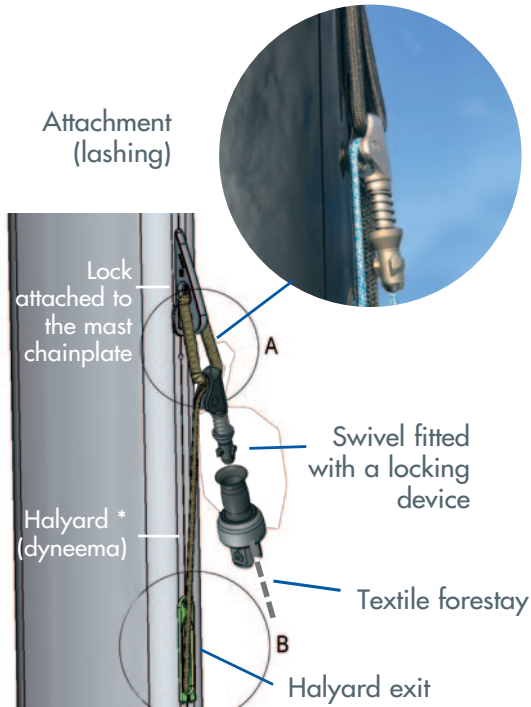

* Halyard partially without outer shell on 1.1 to 1.2 x the luff length

>> Locking Swivels with fixed pin / removable swivel

Pin attached to chain plate (fig 1), the body of the locking swivel flies from the deck – for instance from the bag - to the top of the mast to get secured (fig2)

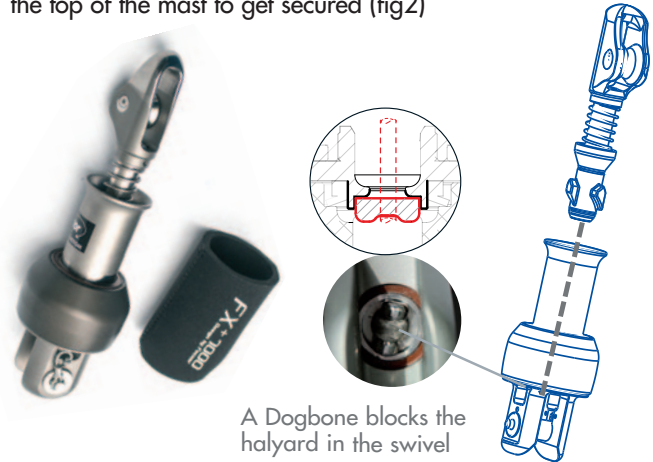

A Dogbone blocks the halyard in the swivel

>> HSW Swivel & lock technical features

HSW Lock model*	2 T 5*	4 T*	5 T	7 T	10 T	+10 T
Working load	2 T 5	4 T	5 T	7 T	10 T	Please contact us

* HSW 2T5 & 4 T = different model compared to the photo above